



VERTICAL LIFT GUIDE

Find the right way to optimize your warehouse

COMPACT





Save up to 90 % of the floor space





Sloping roof

Several floors, several openings

Outside the building

Optimise your stock handling

With Compact Vertical Storage Lifts, we transform all of your stock handling. Weland Solutions customise the vertical storage lift to suit your needs and help you obtain faster and simpler handling of more items in a significantly smaller area. At the same time, your staff benefit from considerably improved working conditions.

Compact vertical storage lifts store your articles vertically, securely and in a controlled way. Each vertical storage lift is adapted to make optimum use of the space. You save 70-90% of the floor space compared to standard shelving and pallet racks.

A vertical storage lift has large effective load trays without posts or end panels that waste space. The machine automatically measures the height of stored goods on trays and allocates an appropriate space within the machine to restore the tray. This means the storage volume is compacted to the maximum with a minimum of space between each load tray. In addition, the full height of the premises can be utilised. There are other important advantages, such as the whole load tray slides out in the access opening, which provides good ergonomics and a gentle working environment.

Customised to suit your premises

Our vertical storage lifts are adapted to suit each company's premises, to ensure the minimum possible floor area holds the largest possible storage volume. Our standard supply height range is 3 to 16 metres. Based on the customer's existing premises with varying ceiling heights, floor structures, door placements and truck routes, etc. we maximise the storage volume on a minimum floor space.


10 STRONG BENEFITS WITH COMPACT VERTICAL STORAGE LIFTS

- 1. Low operating cost
- 2. Efficient stock handling
- 3. Fast ROI (Return on investment)
- 4. Increase in capacity
- Quick installation and commissioning 5.
- 6. Space-saving
- 7. Expandable
- 8. Minimised incorrect picking
- 9. Short training time
- 10. Good ergonomics

VERTICAL STORAGE LIFT GUIDE

What storage needs do you have? By investing in vertical storage lifts from Weland Solutions, you **save up to 90% floor space compared to traditional storage systems**.

In the table we show a general quick guide. If you want to know for sure which vertical storage lift solution will suit your needs, you should contact one of Weland Solutions' sales persons. The three basic models are available at various heights, widths, load capacities etc. In addition, Compact Vertical lifts can integrate with various IT solutions.

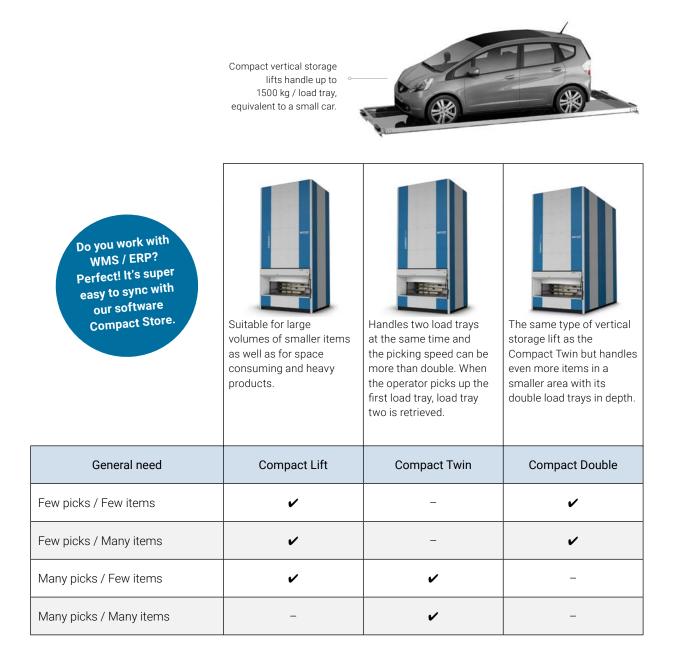

The lift is driven by cogwheels that run on homogeneous gear racks. The load tray manages up to 1500 kg.





Watch a video showing the vertical storage lift working on *welandsolutions.com*



This is how the Compact Lift works

A tray is retrieved and presented in the picking position.



COMPACT LIFT

The lift is driven by cogwheels that run on homogeneous gear racks (rack & pinion). This provides very stable movement and precise positioning of the load tray. With less wear and reduced maintenance requirements, high operating reliability is guaranteed.

TECHNICAL INFORMATION

- Maximum load capacity: 100 000 kg
- Height: 3 000 16 000 mm
- Width: 1 697 6 929 mm
- Depth: 2 698 4 248 mm
- Width, load tray:
 1 220 6 450 mm
- Depth, load tray: 670 - 1 230 mm
- Tray divider: 25/50 mm

- Max. load weight per load tray: 300 - 1 500 kg
- Height of goods measurement (in 25 mm intervals)
- Height of goods measurement: option up to 1 000 mm
- Safety curtain for personal protection
- Storage optimisation
- Weight check

- Password protection
- Group rights and authorisation
- Language selection
- Ambient temperature / Relative humidity (% RH) no condensation: 2 - 40/10 - 85 %
- Voltage, 3-phase: 400 V
- Current, AC 50 Hz (A): 25/32


WELAND

The elevator in the Compact Twin can handle two trays simultaneously, which increases the picking rate.





Watch a video showing the vertical storage lift working on welandsolutions.com



This is how the Compact Twin works

 Tray 1 is presented at the access opening. 2. Tray 2 is then retrieved and brought to the ready position. 3. Tray 1 is removed from the opening and tray 2 is presented at the picking position.
 Tray 1 is returned to storage and tray 3 is fetched.

COMPACT TWIN

When time is of the essence, the Compact Twin is the natural answer. This double tray system always presents trays at a safe and consistent level - without the need to pick at different tray height. By handling two load trays in the same sequence, with one tray in the waiting position and one in the picking position, the picking rate can be more than doubled.

TECHNICAL INFORMATION

- Maximum load capacity: 50 000 kg
- Height: 3 000 16 000 mm
- Width: 2 307 4 137 mm
- Depth: 2 698 2 998 mm
- Width, load tray
 1 830 3 660 mm
- Depth, load tray: 670 - 820 mm
- Tray divider: 25 mm


- Max. load weight per load tray: 300 - 500 kg
- Height of goods measurement (in 25 mm intervals)
- Height of goods measurement: option up to 1 000 mm
- Safety curtain for personal protection
- Storage optimisation
- Weight check

- Password protection
- Group rights and authorisation
- Language selection
- Ambient temperature / Relative humidity (% RH) no condensation: 2 - 40/10 - 85 %
- Voltage, 3-phase: 400 V
- Current, AC 50 Hz (A): 25/32

The vertical storage lift has double load trays in the depth, which means a depth up to 7286 mm.



Watch a video showing the vertical storage lift working on *welandsolutions.com*



This is how the Compact Double works

 Tray 1 is presented at the access opening. 2. Tray 2 is then retrieved and brought to the ready position. 3. Tray 1 is removed from the opening and tray 2 is presented at the picking position.
 Tray 1 is returned to storage and tray 3 is fetched.

COMPACT DOUBLE

The Compact Double utilises the same unique technology as the Compact Twin but extends the storage capacity by potentially storing two trays at each location. With double load trays at each loacation, this results in greater storage area per square metre of floor space, with maintained efficient handling.

TECHNICAL INFORMATION

- Max. load capacity: 100 000 kg
- Height: 3 000 16 000 mm
- Width: 2 307 6 929 mm
- Depth: 4 898 5 370 mm
- Width, load tray:
 1 830 6 450 mm
- Depth, load tray: 820 mm
- Tray divider: 25/50 mm

- Max. load weight per load tray: 300/500/900 kg
- Height of goods measurement (in 25 mm intervals)
- Height of goods measurement: option up to 1 000 mm
- Safety curtain for personal protection
- Storage optimisation
- Weight check

- Password protection
- Group rights and authorisation
- Language selection
- Ambient temperature / Relative humidity (% RH) no condensation: 2 - 40/10 - 85 %
- Voltage, 3-phase: 400 V
- Current, AC 50 Hz (A): 25/32







+46 371 52 30 40 | info@welandsolutions.com | welandsolutions.com

